
FORD TRUCKS 3542P EURO6



Basic Features				
Vehicle Type	Concrete Pump			
Axle	бх4			
Emission	Euro 6			
Cabin Type	Day Cab			
Wheelbase (mm)	4500			
Engine				
Туре	Ecotorq 12,7 liters			
Displacement (cc)	12740			
Bore x Stroke	130 mm x 160 mm			
Power	420 PS (308,9 kW) / 1800 rpm			
Torque	2150 Nm / 1000-1300 rpm			
Compression Ratio	17 +/- 0,5 : 1			
Oil Filling Volume	50 L			
Coolant Volume	57 L			
Transmission				
Clutch	430 mm Single Disc			
Manuel Transmission / Ratios (1. gear - 16. gear)	ZF 16S 2530 (13,805-0,836)			
Steering				
	Power assisted single circuit			
Chassis				
Chassis Thickness	10 mm with Local Reinforcement			
	10 mm with Local Reinforcement 500 MPa			
Chassis Strength				
Chassis Strength Suspension (Front / Rear)	500 MPa			
Chassis Strength Suspension (Front / Rear) Axle	500 MPa 90 mm Parabolic Leaf Springs / 100 mm Parabolic Tandem Suspension			
Chassis Strength Suspension (Front / Rear) Axle Axle Ratio	500 MPa 90 mm Parabolic Leaf Springs / 100 mm Parabolic Tandem Suspension Hub Reduction			
Chassis Strength Suspension (Front / Rear) Axle Axle Ratio Tyres	500 MPa 90 mm Parabolic Leaf Springs / 100 mm Parabolic Tandem Suspension Hub Reduction 4,08			
Chassis Strength Suspension (Front / Rear) Axle Axle Ratio Tyres Wheel Rim	500 MPa 90 mm Parabolic Leaf Springs / 100 mm Parabolic Tandem Suspension Hub Reduction 4,08 315/80 R 22,5			
Chassis Strength Suspension (Front / Rear) Axle Axle Ratio Tyres Wheel Rim Braking System	500 MPa 90 mm Parabolic Leaf Springs / 100 mm Parabolic Tandem Suspension Hub Reduction 4,08 315/80 R 22,5			
Chassis Strength Suspension (Front / Rear) Axle Axle Ratio Tyres Wheel Rim Braking System Brakes (Ø mm x mm Length)	500 MPa 90 mm Parabolic Leaf Springs / 100 mm Parabolic Tandem Suspension Hub Reduction 4,08 315/80 R 22,5 22,5 x 9 Steel			
Chassis Strength Suspension (Front / Rear) Axle Axle Ratio Tyres Wheel Rim Braking System Brakes (Ø mm x mm Length) Braking System	500 MPa 90 mm Parabolic Leaf Springs / 100 mm Parabolic Tandem Suspension Hub Reduction 4,08 315/80 R 22,5 22,5 x 9 Steel 410 x 200 Z-Cam Brake System			
Chassis Strength Suspension (Front / Rear) Axle Axle Ratio Tyres Wheel Rim Braking System Brakes (Ø mm x mm Length) Braking System Engine Brake Power	500 MPa 90 mm Parabolic Leaf Springs / 100 mm Parabolic Tandem Suspension Hub Reduction 4,08 315/80 R 22,5 22,5 x 9 Steel 410 x 200 Z-Cam Brake System Dual Brake Circuit - Air Processing Unit with Integrated Oil Seperator and Heater			
Chassis Strength Suspension (Front / Rear) Axle Axle Ratio Tyres Wheel Rim Braking System Brakes (Ø mm x mm Length) Braking System Engine Brake Power Electrical System	500 MPa 90 mm Parabolic Leaf Springs / 100 mm Parabolic Tandem Suspension Hub Reduction 4,08 315/80 R 22,5 22,5 x 9 Steel 410 x 200 Z-Cam Brake System Dual Brake Circuit - Air Processing Unit with Integrated Oil Seperator and Heater			
Chassis Strength Suspension (Front / Rear) Axle Axle Ratio Tyres Wheel Rim Braking System Brakes (Ø mm x mm Length) Braking System Engine Brake Power Electrical System Battery	500 MPa 90 mm Parabolic Leaf Springs / 100 mm Parabolic Tandem Suspension Hub Reduction 4,08 315/80 R 22,5 22,5 x 9 Steel 410 x 200 Z-Cam Brake System Dual Brake Circuit - Air Processing Unit with Integrated Oil Seperator and Heater max. 320 kW (Engine Level)			
Chassis Strength Suspension (Front / Rear) Axle Axle Ratio Tyres Wheel Rim Braking System Brakes (Ø mm x mm Length) Braking System Engine Brake Power Electrical System Battery Alternator / Starter Motor	500 MPa 90 mm Parabolic Leaf Springs / 100 mm Parabolic Tandem Suspension Hub Reduction 4,08 315/80 R 22,5 22,5 x 9 Steel 410 x 200 Z-Cam Brake System Dual Brake Circuit - Air Processing Unit with Integrated Oil Seperator and Heater max. 320 kW (Engine Level) 225 Ah			
Chassis Thickness Chassis Strength Suspension (Front / Rear) Axle Axle Ratio Tyres Wheel Rim Braking System Brakes (Ø mm x mm Length) Braking System Engine Brake Power Electrical System Battery Alternator / Starter Motor Tanks Fuel Tank	500 MPa 90 mm Parabolic Leaf Springs / 100 mm Parabolic Tandem Suspension Hub Reduction 4,08 315/80 R 22,5 22,5 x 9 Steel 410 x 200 Z-Cam Brake System Dual Brake Circuit - Air Processing Unit with Integrated Oil Seperator and Heater max. 320 kW (Engine Level) 225 Ah			

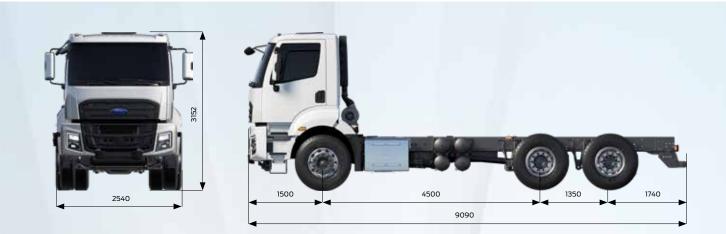

Sharing the load

Dimensions (mm)				
Front Overhang			1500	
Wheelbase			4500	
Overall Length			9090	
Distance Between 2 nd and 3 th Wheel Centers			1350	
Overall Cab Length			1820	
Overall Vehicle Height			3152	
Overall Vehicle Width (Excluding Mirrors)			2540	
Chassis Width			770	
Rear Overhang			1740	
Useful Chassis Length			6687	
Chassis Height-Front			1116	
Chassis Height-Rear			1147	
Ground Clearance-Front			382	
Ground Clearance-Rear			294	
Turning Radius			9790	
Weights (kg)	1. Axle	2. Axle	3. Axle	Total
Technically Permissible Weights	8000	13400	13400	34000
Kerb Weight	5547	2228	2228	10003
Payload	2453	11172	11172	23997
GVM (Legal)	8000	9500	9500	26000

STANDARD EQUIPMENT

- Manual Air Conditioner
- Multimedia System with 9" Touch Screen & Navigation (Radio, Bluetooth, USB (A Type - C Type), Apple CarPlay, Android Auto, Remote Control)
- Conventional 4-point independent Cab Suspension for Day Cabin
- Cruise Control
- Drum Brake
- Engine Brake
- Anti-Lock Brake System (ABS)
- Pad Wear Indicator
- Differential Lock
- Electrically Operated Windows
- Electrically Operated and Heated Side mirrors
- Electrically Operated Headlight Leveling
- Rake and Reach Adjustable Steering Column
- Heated and Air Suspended Driver Seat and Fixed Passenger Seat
- Lumbar Support
- Front Vehicle Antiroll Bar
- Immobilizer
- Home Safe Lights
- Approach Lights
- Double Roof Marker Lamps
- Spare Wheel
- Short Bumper
- Switchable Air Compressor for Improved Fuel Economy
- **Rear Window**
- Horizontal Exhaust
- Tachograph
- Front Towing Hooks (Double Hook)
- DAB Radio*
- Advanced Driver-Assistance Systems (Cybersecurity Improvements, Rear View Camera, Moving-off Information System, Blind Spot Information System, Tire Pressure Monitoring System, Emergency Stop Signal, Alcohol Interlock Facilitation, Traffic Sign Recognition, Driver Alert System, Lane Keeping Alert)
- Electronic Brake System (EBS) and
- Electronic Stability Control (ESP)
- Automatic Traction Control (ATC)

OPTIONAL EQUIPMENT

- Cold Pack (Includes Wet Type Heater and 225 Ah Battery)
- Engine Driven PTO
- (includes Power Take off Control Unit) Manually Operated Sunroof
- Auxiliary Cabin Heater (Wet Type) Power Cab Tilting
- Metallic Paint / Special Colors ٠
- Lateral Protection
- Dual Passenger Seat
- Less Spare Tire
- Led Headlamps

March / 202

*DAB Radio can be standard or optional according to the market.

This leaflet includes products designed for Ford vehicles. It provides information about the current technical specifications and the standard or optional accessories available as of the date it was issued. Features of standard and optional accessories of the vehicles may be changed from time to time. For this reason, please consult our Authorized Dealers to obtain updated and accurate information on the features of the vehicle you wish to buy. For the aforementioned reason, this leaflet does not constitute an assurance as to the specifications listed herein. The images used in this leaflet may be different from the vehicles on sale. The technical specifications provided herein are for standard vehicles Selection of any optional accessories might cause differences from these specifications.